

## FLANGED FLOW THRU DIAPHRAGM SEAL

Reotemp's Flanged Flow Thru Diaphragm Seals are ideal for installation in applications requiring little interruption to process flow. This style flow thru diaphragm seal can be made to specific face-to-face dimensions in order to fit existing piping structures.



W575

DIAPHRAGM SEALS

### FEATURES / BENEFITS

- Welded Diaphragm for Maximum Durability
- Wide Variety of Diaphragm and Material Options
- Continuous Flow Design Reduces Clogging Potential; Ideal for Slurries or High Viscosity Fluids
- Easy Cleanout of Diaphragm Cavity without Compromising Filled System

### SPECIFICATIONS

<b>Diaphragm</b>	316SS, Hast C-276, Tantalum, Monel, or others
<b>Lower Housing</b>	316SS, Hast C-276, Monel, or others
<b>Gasket</b>	PTFE, Grafoil, or Klinger
<b>Upper Housing</b>	316SS Standard

#### Process Temperature Limits


	W575
PTFE Gasket	-110/350°F
Klinger Gasket	-110/450°F
Grafoil Gasket	-40/750°F

<b>Ambient Temperature Limits</b>	Determined by the pressure instrument.
-----------------------------------	--

<b>Max Working Pressure</b>	The Maximum Working Pressure of the Diaphragm Seal is Based on the Flange Rating, Pipe Schedule and Material. Contact Factory for Details
-----------------------------	---

#### Minimum Recommended Span

	W575
2.5" & 3.5" Gauges	15 psi
4", 4.5", & 6" Gauges	30 psi
Transmitter (Gauge Pressure)	150" H <sub>2</sub> O
Transmitter (Differential Pressure)	300" H <sub>2</sub> O <sub>d</sub>
Differential Pressure Gauge (D40/42 Only)	N/A

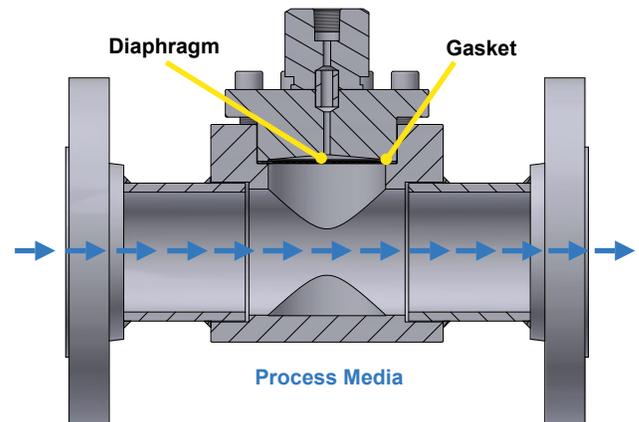

*Need a replacement upper housing only? See the Saddle Seal Datasheet - Model W545*

## FLANGED FLOW THRU DIAPHRAGM SEAL

**HOW TO ORDER:** Choose options to build a part number. For example: **W5752R21S4SSS-SKDTD-AS-PP**

SEAL TYPE	INSTRUMENT CONNECTION	SEALING TYPE	PIPE SIZE	FLANGE CLASS	END-TO-END	PIPE SCHEDULE	DIAPHRAGM MATERIAL	LOWER HOUSING
<b>W575</b> = Flanged Flow Thru; Welded Diaphragm	<b>2</b> = 1/2" FNPT <b>4</b> = 1/4" FNPT Transmitter Connection	<b>R</b> = Raised Face <b>J</b> = Ring Type Joint <b>F</b> = Flat Face	<b>0</b> = 1/2" <b>T</b> = 3/4" <b>1</b> = 1" <b>H</b> = 1.5" <b>2</b> = 2" <b>3</b> = 3" <b>4</b> = 4"	<b>1</b> = 150# <b>3</b> = 300# <b>6</b> = 600# <b>9</b> = 900#/1500 <b>5</b> = 2500# <b>7</b> = 900# <b>8</b> = 1500#*	<b>S</b> = Standard "E" Dimension Per Drawing on Datasheet <b>Q</b> = Custom Length	<b>1</b> = Schedule 10 <b>4</b> = Schedule 40 <b>8</b> = Schedule 80 <b>6</b> = Schedule 160 <b>9</b> = Schedule XXS	<b>S</b> = 316SS <b>U</b> = Tantalum <b>M</b> = Monel (A400) <b>D</b> = Carpenter 20 <b>H</b> = Hast C-276 <b>Y</b> = Inconel (625) <b>N</b> = Nickel (201) <b>2</b> = Duplex (2205) <b>J</b> = Titanium*	<b>S</b> = 316SS <b>M</b> = Monel (A400) <b>D</b> = Carpenter 20 <b>H</b> = Hast C-276 <b>Y</b> = Inconel (625) <b>N</b> = Nickel (201) <b>2</b> = Duplex (2205) <b>J</b> = Titanium
							*Requires Titanium Upper Housing Wetted	Wetted

DIAPHRAGM SEALS

UPPER HOUSING	BOLTING	GASKET	INSTRUMENT MOUNT	FILL FLUID	OPTIONS
---------------	---------	--------	------------------	------------	---------

**S** = 316SS  
**F** = 304SS  
**J** = Titanium\*

**-8** = Carbon Steel (Grade 8)  
**-T** = Stainless Steel (18/8)  
**-S** = Stainless Steel (316)

**K** = Klingler (C-4401)  
**T** = PTFE  
**G** = Grafoil

**Direct Mount**  
**DTD** = Direct Mount, Threaded  
**DWD** = Direct Mount, Welded  
**RTR** = 6" Cooling Tower  
**STW** = 3" Cooling Standoff  
**Remote Mount**  
**A??** = Armored Capillary, 2mm, Threaded  
**B??** = Armored Capillary, 2mm, Welded  
**W??** = PVC Coated Armor, 2mm, Threaded  
**P??** = PVC Coated Armor, 2mm, Welded

**Common Fills**  
**-AS** = Silicone DC200  
**-AG** = Glycerin USP  
**-BP** = Propylene Glycol  
**-XX** = No Fill Fluid

**-PP** = Pulse Plus™ (Pulsation Protection)  
**-OX** = Cleaned for Oxygen Service  
**-AU** = Gold-Plated Diaphragm  
**-TC** = Teflon-Coated Diaphragm  
**-TS** = SS Tag (1-10 Character)  
**-PM** = Positive Material Identification Certification  
**-MR** = Mill Test Report  
**-HT** = Hydrostatic Test per ASME B31.3

\*Requires Titanium Diaphragm

\*Bolts provided are 5/16"-24 Fine Thread

See Page 88 for Complete Gasket Selection Guide


Note: ?? = Length in feet (e.g. 05 = 5 feet)

**Tree Mount**  
**LVC** = Low Volume Goal Post Assembly; Vertical Mount; Gauge/Switch  
**MVG** = Compact Tree Assembly; Vertical Mount; Gauge/Switch  
**YYY** = Dry Seal, No Instrument


See Page 84 for Mounting Guide, Including Capillary with Different Bore Sizes

## FLANGED FLOW THRU DIAPHRAGM SEAL

DIAPHRAGM SEALS





Style A W575

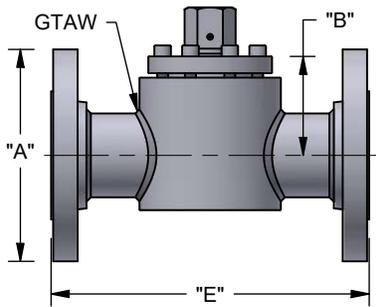


W575 Style A					
Size	Flange Rating	A	B	E	D
1/2"	150	3.5"	2.7"	7"	3.5"
1/2"	300	3.75"	2.7"	7"	3.5"
3/4"	150	3.88"	3"	7"	3.5"
3/4"	300	4.63"	3"	7"	3.5"
1"	150	4.25"	3.2"	7"	3.5"
1"	300	4.88"	3.2"	8"	3.5"
1 1/2"	150	5"	3.9"	8"	4.0"
1 1/2"	300	6.13"	3.9"	9"	4.0"
2"	150	6"	4.4"	9"	4.0"
2"	300	6.5"	4.4"	10"	4.0"

Style B W575

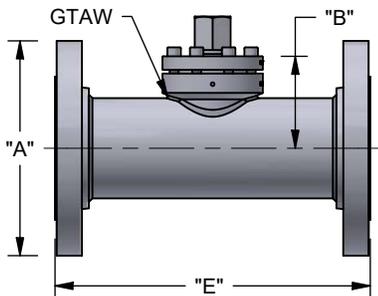


W575 Style B					
Size	Flange Rating	A	B	E	D
3"	150	7.5"	3.3"	11"	3.5"
3"	300	8.25"	3.3"	12"	3.5"

FLANGED FLOW THRU DIAPHRAGM SEAL




Style C W575

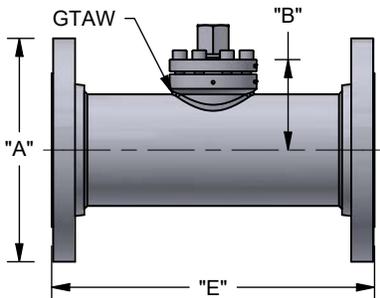

W575 Style C					
Size	Flange Rating	A	B	E	D
4"	150	9"	3.7"	13"	3.5"
4"	300	10"	3.7"	14"	3.5"
6"	150	11"	4.7"	16"	3.5"
6"	300	12.5"	4.7"	17"	3.5"
8"	150	13.5"	5.7"	16"	3.5"
8"	300	15"	5.7"	17"	3.5"

## SMART TRANSMITTER ATTACHMENT

### HOW TO ORDER: Unbalanced System Example


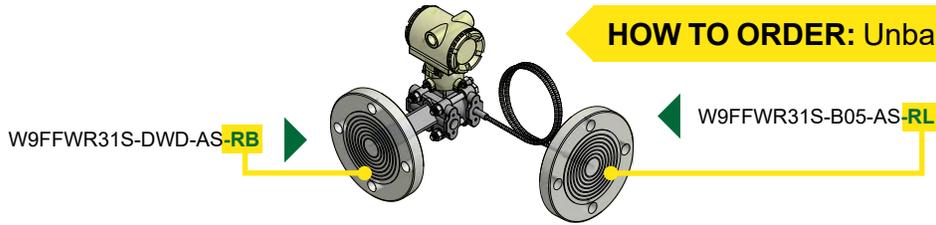


### DIFFERENTIAL PRESSURE ASSEMBLY


**Balanced System** A complete assembly with one part number that includes two diaphragm seals, two capillaries, two fills, and one complete assembly calibration certificate.

**Unbalanced DP System** Where seal, mount, capillary, or fill is not identical. A complete assembly includes one diaphragm seal on the HP side AND one diaphragm seal on the LP side.


DIAPHRAGM SEALS

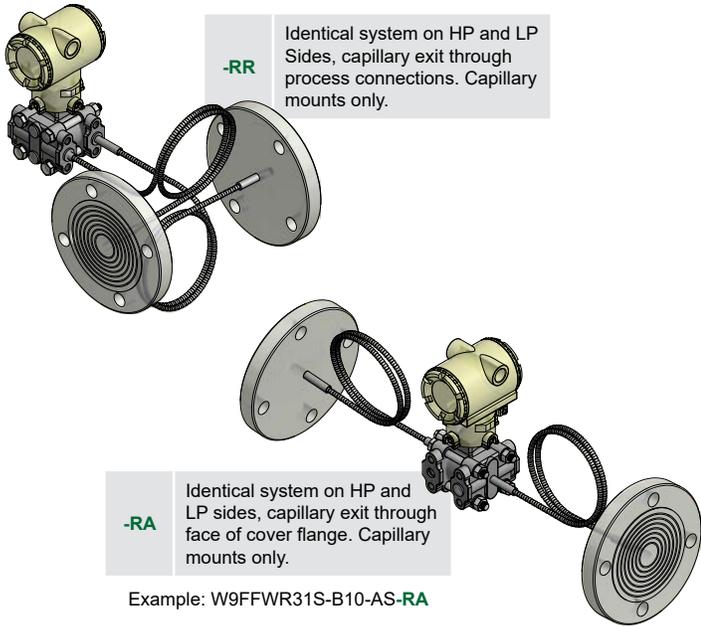


**-RH** Mount via Process Connections  
Side High Pressure



**-RL** Mount via Process Connections  
Side Low Pressure



**-RB** Mount via Face of Cover Flange  
Side High Pressure



**-RC** Mount via Face of Cover Flange  
Side Low Pressure


### GAUGE PRESSURE ASSEMBLY

#### In Line Pressure Transmitter


**Traditional Mount for Gauge Pressure** Seal mount on one side only, other side is vented.




**-R1** Mount to In-Line Gauge Pressure Transmitter. Direct or remote mount.



**-R4** Horizontal Mount (Tank Mount) to In-Line Gauge Pressure Transmitter. Direct mount only.



**-R2** Instrument mount through process connections, HP Side. Use "R3" if mounting to LP side




**-R8** Instrument mount through face of cover flange, HP Side. Use "R9" if mounting to LP Side

## INSTRUMENT MOUNTING CONFIGURATIONS

### DIRECT MOUNT

Direct Mounting a pressure gauge, switch, or transmitter is the most common diaphragm seal assembly.

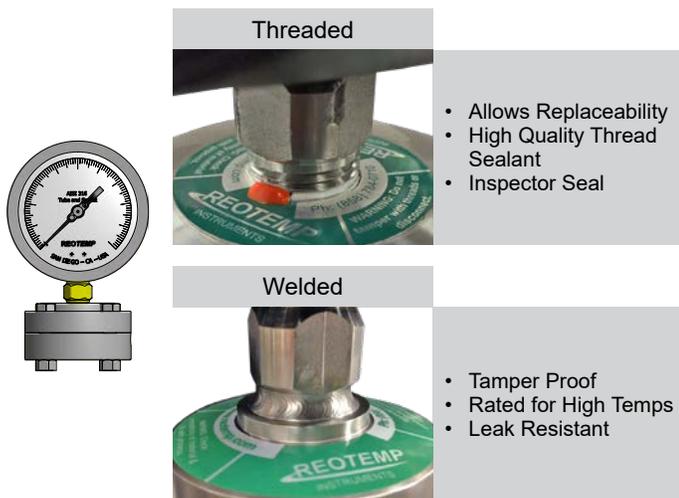

Threaded

- Allows Replaceability
- High Quality Thread Sealant
- Inspector Seal

Welded


- Tamper Proof
- Rated for High Temps
- Leak Resistant

Code	Description	Max. Temp
-DTD	Threaded Instrument Connection	400°F
-DWD	Welded Instrument Connection	600°F

**Assembly Notes:** Welded connection recommended for pressure exceeding 1,500 psi for purposes of leak prevention.

### REMOTE MOUNT

Remote Mounting a pressure instrument using flexible capillary is a common mounting method when the point of measurement is in a hazardous or inconvenient location.




Code	Description
A	Armored, Threaded, 2mm
B	Armored, Welded, 2mm
W	PVC, Threaded, 2mm
P	PVC, Welded, 2mm
C	Armored, Threaded, 1mm
E	Armored, Welded, 1mm
F	PVC, Threaded, 1mm
G	PVC, Welded, 1mm
H	Armored, Threaded, 0.55mm
J	Armored, Welded, 0.55mm
K	PVC, Threaded, 0.55mm
L	PVC, Welded, 0.55mm

Note: ?? = Length in feet (e.g. 05 = 5 feet)

**Assembly Notes:** 2mm, 1mm, and .55mm are capillary inner diameter. Ambient temperature limit of PVC coated armor is 250°F. Process temperature limit of threaded connections is 400°F. Standard instrument connection is threaded (Smart Transmitters are welded), unless specified by customer.

### COOLING ELEMENTS

Used in either high temp or cold temp applications, Cooling Elements mounted above diaphragm seals quickly normalize fluid temperature toward ambient. This protects the pressure instrument while still maintaining the convenience of a direct mount.

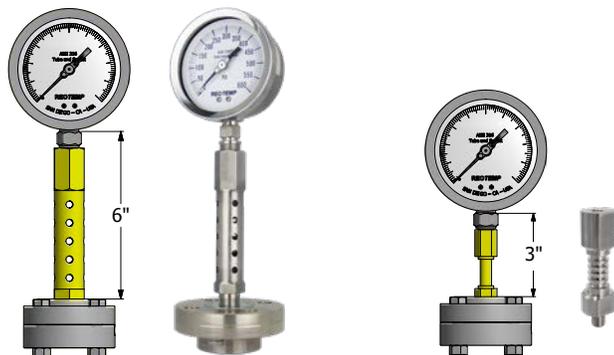

-RTR


-STW

Code	Description	Max. Temp
-RTR	6" Cooling Tower	750°F
-STW	3" Cooling Standoff	600°F

**Assembly Notes:** Cooling elements are welded to diaphragm seal. Instruments are threaded to cooling element unless specified. All lengths are nominal.

### TREE ASSEMBLIES

Tree Assemblies offer the ability to mount two pressure instruments onto one diaphragm seal, allowing the user to gain both a local indication and a remote signal without adding an additional pipe insertion.

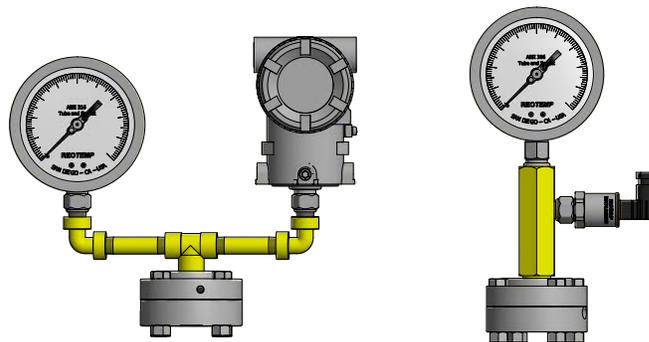

-TRE & -TRX

-TRM

Code	Description	Max. Temp
-TRE	Goal Post, Low Pressure Assembly (Max. 150 psi)	400°F
-TRX	Goal Post, Heavy Duty (Max. 3,000 psi)	600°F
-TRM	Compact Tree Assembly (Max. 3,000 psi)	600°F

**Assembly Notes:** Threaded joints are fully welded for consistent instrument orientation. Instrument connections are threaded unless specified by customer. Diaphragm seal must displace enough fluid to drive both instruments.

## GASKET SELECTION GUIDE

Gasket selection depends on your process temperature, reactivity and other variables. For most applications Klinger is standard however suitability for process is determined by the customer.

### GASKET SELECTION CHART

Code	Material	Maximum Temperature (°F)	Minimum Temperature (°F)	Description	Common Applications	Cost
K	Klinger C4401	500°F	-110°F	Compressed aramid synthetic fiber reinforced with a nitrile binder. Excellent sealability and general purpose use	Mild inorganic and organic acids, concentrated and diluted alkalis, water, brine, industrial gases, oils, refrigerants, petroleum and derivatives	-
5	Silver Ag 3N5	750°F	-150°F	(Preferred choice for high temp, low temp, and high pressure applications) 99.95% pure silver (Ag) sheet. Exceptional sealability and use in extreme temperature and pressure applications. Only gasket that can be re-used in certain conditions	Extreme Temperatures and Pressures, Cryogenics, Nuclear, Deep Vacuum, Solvents, Alcohols, Steam, Silicone, Vegetable and Petroleum oils, Fuels	\$\$
Y	Gylon 3510	500°F	-150°F	(Preferred choice for most corrosive applications) PTFE filled with barium sulfate. Good Sealability as well as improved relaxation and cold flow resistance versus PTFE	Strong caustics, hydrocarbons, steam, chlorine, moderate acids, cryogenics, aluminum fluoride	\$\$
T	Virgin PTFE	400°F	-150°F	Polytetrafluoroethylene Resin. Exceptional chemical resistance. Poor cold flow and relaxation properties	Inert to nearly all chemicals	\$
Z	Kalrez	620°F	30°F	High temperature resistant perfluoroelastomer with excellent tensile strength, sealability, and elasticity	Oxidizing and Reactive Chemicals, Steam, Alcohols, Aldehydes, Ethers, Esters, Ketones, Acids and Bases	\$\$
C	Top Chem 2000	450°F	-150°F	PTFE filled with silicone carbide (SiC). Excellent Sealability and improved relaxation resistance over PTFE	Strong acids and alkalines, Steam, Motor fuel and oils, Aromates, Esters, Ketones, Alcohols	\$\$
M	EPDM	200°F	-20°F	Ethylene Propylene Diene Monomer Rubber. Good elasticity, Tensile Strength, and Sealability. Exhibits limited elevated temperature resistance.	Silicone and Vegetable oils, Ketones, Esters, Alkalies, Most Acids, Water	\$
V	Viton	400°F	-10°F	Fluorinated synthetic polymer or fluoroelastomer that contains excellent elasticity, tensile strength, and sealability as well as good medium temperature resistance	Variety of acids and bases, animal and vegetable oils, hydrocarbons	\$
G	Grafoil	750°F	-40°F	Made of pure compressed homogenous graphite flake with a corrosion inhibitor. Contains no binders or resins. Very fragile with very low tensile strength and elasticity	Elevated temperature processes, aggressive and corrosive chemicals, Nuclear	\$
B	Buna-N	200°F	-20°F	Also known as NBR, is a black nitrile synthetic rubber compound with excellent elasticity, tensile strength, and abrasion resistance, but exhibits poor elevated temperature characteristics	Petroleum-Based and Synthetic Oils, Alcohols, Hydraulic Fluids, Fuels, Water, Silicone Greases, Solvents	\$

DIAPHRAGM SEALS

**Re-use:** Re-use subject to gasket condition and presence of corrosion or pitting on mating parts. Only recommended for up to three re-use cycles. Re-assembly of the diaphragm seal to be performed per Reotemp standards and procedures to ensure proper seating.

**Max Working Pressure:** Gasket Selection does not impact the MWP of the configured diaphragm seal.

**Process Compatibility:** The listed common applications are to be used as a guide only. Actual chemical compatibility of the process with the chosen gasket material should be approved by qualified personnel.

## FILL GUIDE

Diaphragm seals are designed to protect pressure instruments from hot process media and corrosive chemicals while minimizing any negative effect on instrument accuracy and durability. A well-made diaphragm seal can achieve this goal only if it is properly assembled, filled, and tested. Reotemp's highly trained technicians use state-of-the-art equipment so that every diaphragm seal assembly is filled and tested to assure optimal instrument performance:

- ✓ 24-hour Minimum Fluid De-gassing
- ✓ Evacuated Instrument Chamber Up to 10<sup>-8</sup> mbar Absolute
- ✓ Complete Fill Integrity Check
- ✓ Fill-port Leak Test
- ✓ Post-fill Static Test
- ✓ Verification of Instrument Calibration
- ✓ High-temp Pipe Sealant Option for Joints
- ✓ Tamper-proof (Inspection Seal) Lacquer used on All Threaded Joints
- ✓ Sturdy Diaphragm Packaging Protection

DIAPHRAGM SEALS

Part Number Code	Name	Description	Temperature Range (Vacuum Service <5psia)		Viscosity cst @ -77°F	Specific Gravity @ -77°F	Thermal Expansion cc/cc°C
<b>STANDARD FILL FLUID</b>							
<b>AS</b>	Silicone DC200 <sup>1</sup>	This is the standard fill fluid for most diaphragm seal applications.	-40°F to 400°F (-40°F to 250°F)	Yes	20	0.94	.00104
<b>HIGH TEMP SILICONE</b>							
<b>BH</b>	Silicone DC704 <sup>1</sup>	Standard for Smart Transmitters and capillary systems. Performs well in applications with high temperature and a deep vacuum.	0°F to 650°F (0°F to 450°F)	No	44	1.07	.00077
<b>B1</b>	Silicone DC710 <sup>1</sup>	Highest temperature rating; ideal for gauge seal assemblies. Too thick for capillary assemblies. Response time can become very slow in cold conditions.	50°F to 750°F (50°F to 400°F)	Yes	500	1.11	.00043
<b>C8</b>	Syltherm 800 <sup>2</sup>	Low viscosity allows it to perform well in both low and high temperatures. Not recommended for vacuum service or at high temperatures when under low static pressure.	-40°F to 750°F (-40°F to 150°F)	No	9.5	0.93	.00136
<b>B5</b>	Silicone DC705 <sup>1</sup>	Performs very well in high temperatures when under vacuum. The high viscosity and freezing point of this fluid makes it a poor choice for cold or outdoor installations without heat tracing.	50°F to 675°F (50°F to 550°F)	Yes	175	1.09	.00096
<b>B2</b>	Silicone DC550 <sup>1</sup>	Similar high temperature performance as DC705, however it performs better at lower temperatures.	-40°F to 575°F (-40°F to 400°F)	No	125	1.07	.00076
<b>FOOD GRADE</b>							
<b>AG</b>	Glycerin USP	This is the standard fill fluid for most gauge seal assemblies for food, beverage, and pharmaceutical applications. Its high viscosity will cause very slow response at times in low temperature and outdoor installations.	60°F to 450°F (Not Suitable)	Yes	1100	1.26	.00061
<b>BN</b>	NEOBEE M20 <sup>7</sup>	Low viscosity and a wide temperature range makes this the standard sanitary fill fluid for Smart Transmitters and capillary systems.	-10°F to 400°F (-10°F to 200°F)	No	10	0.92	.00101
<b>BS</b>	Food Grade Silicone	Highest temperature limit for food grade fluids. Because of its high viscosity it does not perform well in low temperatures.	20°F to 550°F (20°F to 250°F)	Yes	350	0.97	.00096
<b>BP</b>	Propylene Glycol	This is the fill fluid used when Glycol is called for on the customer specification. It has a very narrow temperature range.	0°F to 200°F (Not Suitable)	No	2.85	1.03	.00073
<b>INERT (TYPICALLY FOR CHLORINE AND OXYGEN APPLICATIONS OR IN SILICONE-FREE ENVIRONMENTS)</b>							
<b>C1</b>	Fomblin Y06 <sup>4</sup>	Ideal inert fluid for transmitter applications. Relatively high vapor pressure above 200°F. Not recommended for use in high temperature situations with low static pressure.	-40°F to 450°F (0°F to 250°F)	No	71	1.88	.00086
<b>C2</b>	Halocarbon 6.3 <sup>3</sup>	Standard inert fluid used in gauge seal assemblies.	-40°F to 400°F (-40°F to 200°F)	Yes	6.3	1.87	.00084
<b>C3</b>	Halocarbon 1.8 <sup>3</sup>	Typically used in low temperature applications because of its low viscosity.	-110°F to 220°F (-100°F to 100°F)	No	1.8	1.82	.00084
<b>C4</b>	Fluorolube FS-5 <sup>5</sup>	Similar performance to Halocarbon 6.3, however not suitable for vacuum service.	-40°F to 450°F (Not Suitable)	No	5	1.86	.00087
<b>SPECIALTY</b>							
<b>CK</b>	Krytox 1506 <sup>6</sup>	Specialty fill fluid, inert.	-40°F to 350°F (-40°F to 300°F)	No	62	1.88	.00095
<b>BE</b>	Ethylene Glycol	Occasionally used in annular (O-ring) seal assemblies.	-25°F to 320°F (Not Suitable)	No	30	1.10	.00062
<b>CT</b>	Syltherm XLT <sup>2</sup>	Used for very low process temperatures.	-150°F to 500°F (Not Suitable)	No	1.4	0.85	.00168

1 Trademark Dow Corning

3 Trademark Halocarbon Product Corporation

5 Trademark Hooker Chemical Company

7 Trademark Stepan Specialty Products

2 Trademark The Dow Chemical Company

4 Trademark AUSIMONT S.P.A

6 Trademark The Chemours Company FC, LLC

Note: PulsePlus™ fill fluids may have different physical properties than specified. Chemical composition and temperature ranges do not vary.